

A. C. GOVERNED MOTORS

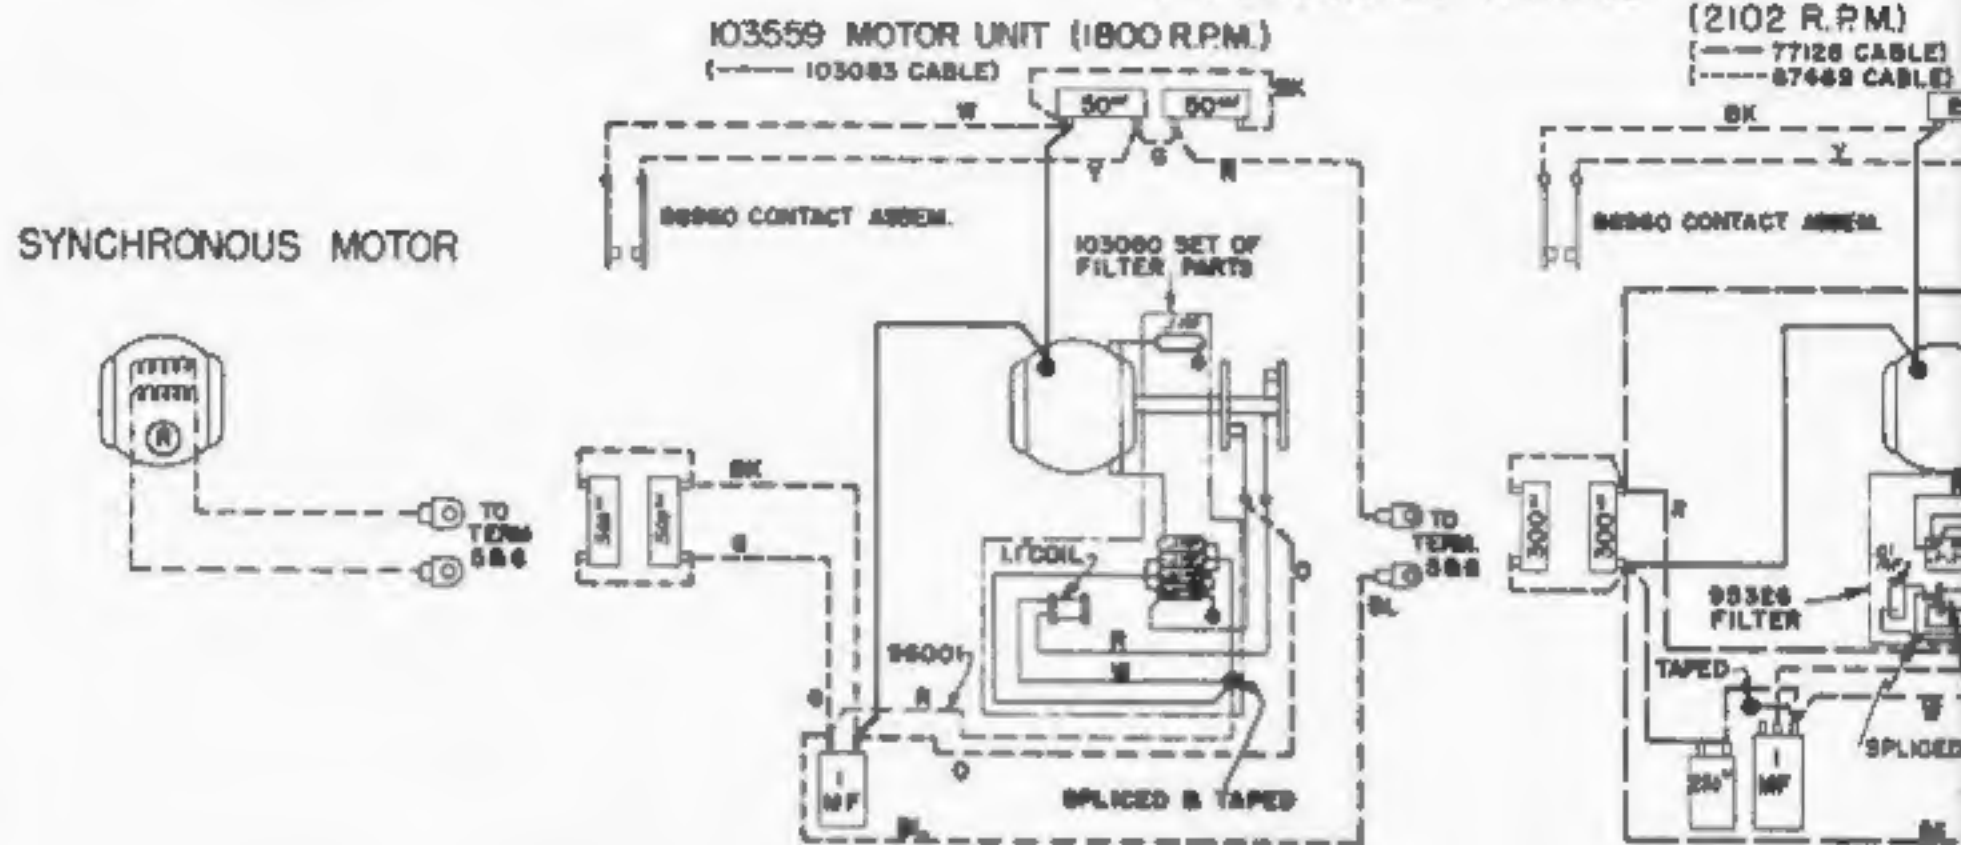


FIGURE 2

LOCATION OF 98960 CONTACT ASSEMBLY OPERATED BY ARMATURE EXTENSION ARM RELEASE MAGNET

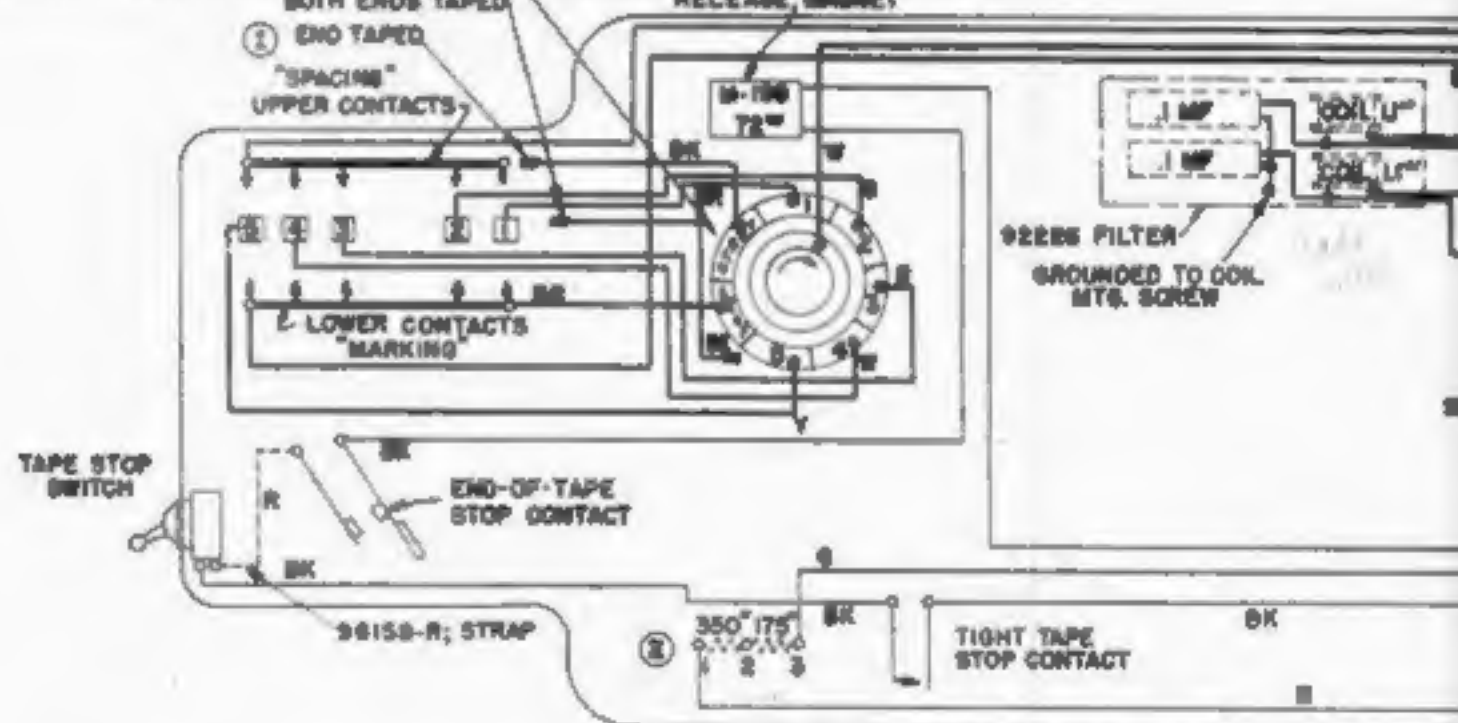


FIGURE 1

NOTES:

ALL WIRES "DELTA BESTON" #18 COTTON COVERED
FIXTURE, EXCEPT MOTOR LEADS.

UNITS SHOWN DOTTED ARE UNDERNEATH BASE.

---THIN LINES INDICATE WIRES NOT IN CABLE.

(I) CONNECT LEAD WHEN POLAR SIGNALS ARE USED.

(II) WHEN SHIPPED, THE RELEASE MAGNET IS WIRED FOR 110 V.D.C. OPERATION OF
MAGNET (WITHOUT STRAP). WHEN RELEASE MAGNET IS OPERATED ON 110 V. A.C.
50 OR 60 CYCLES RESISTOR TERMINALS 1 & 2 SHOULD BE STRAPPED.
WHEN OPERATED ON 25 CYCLES, RESISTOR TERMINALS 2 & 3 SHOULD BE
STRAPPED.

ASSOCIATED CABLE

77136

77135

REVISIONS

(2102 R.P.M.)

(--- 7720 CABLE)
(--- 8740 CABLE)

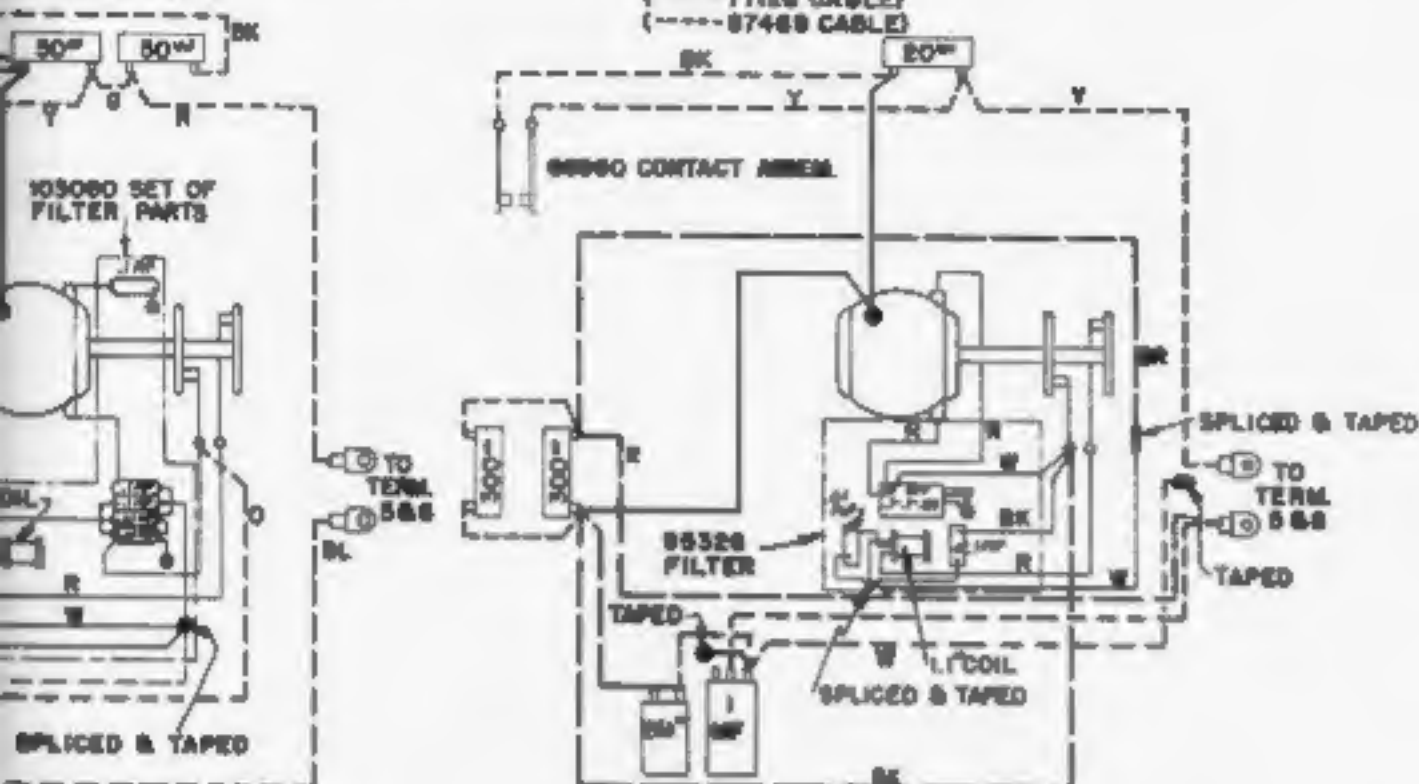


FIGURE 2

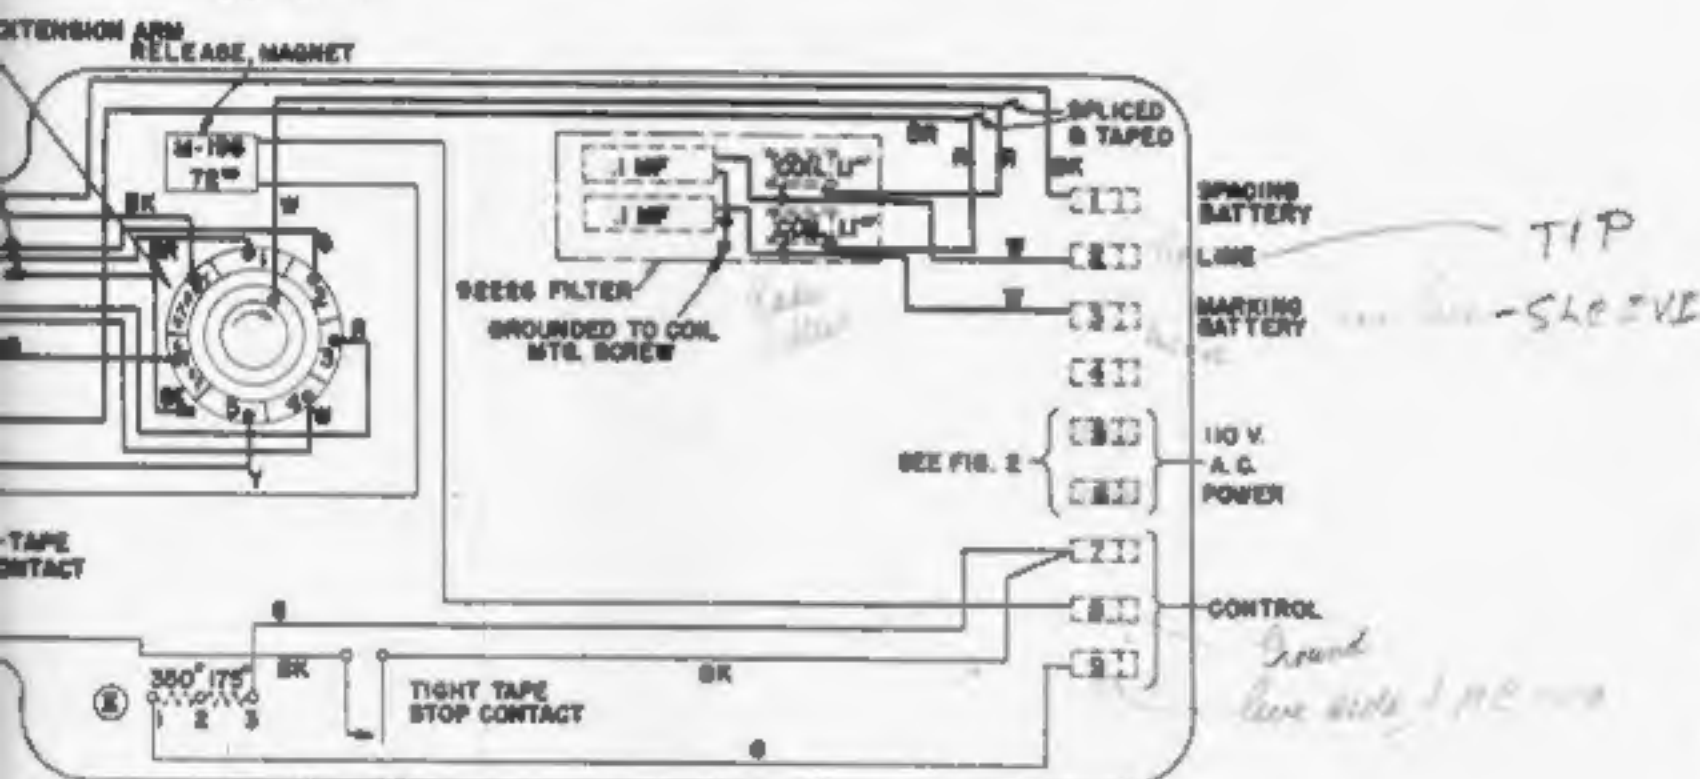


FIGURE 1

COTTON COVERED
UNDERNEATH BASE.
IS NOT IN CABLE.
TERMINALS ARE USED.
MAGNET IS WIRED FOR 110 V.D.C. OPERATION OF
RELEASE MAGNET IS OPERATED ON 110 V.A.C.
TERMINALS 1 & 2 SHOULD BE STRAPPED.
TERMINALS 3 & 4 SHOULD BE

ASSOCIATED CABLES

77130
77135

COLOR CODE

G - GREEN
R - RED
W - WHITE
Y - YELLOW
BR - BROWN
BK - BLACK
O - ORANGE
BL - BLUE

**TELETYPE
CORPORATION**

WD-2084

TD

**WIRING DIAGRAM
TRANSMITTER
DISTRIBUTOR**

XD71AJ
XD71AB
XD71BX
XD71E3

WITH 92226, 95526
AND 103080
FILTERS

DRAWN *Passon*
TRACED
CHECKED
ENG'D *by*
APPROVED *E. L. Brown*